

## General


The resistance evaluation unit 462.4x is a safety relay designed to monitor two GELBAU Contact-Duo safety switching strips with a resistance of 8.2 kΩ each as an electrical termination. The 462.4x model series has a two-channel configuration and includes a control which monitors redundancy.

The two switching strips trigger the stop output (13, 14 / 23, 24), which comprises two force guided relays and includes a reset function.


With an additional changeover contact (31, 32, 34), a notification contact or auxiliary contact is available.

The safety system complies with the **EN ISO 13849-1: 2008** standard and the **EN ISO 13856-2: 2013** European standard for pressure-sensitive protective devices as they apply to output switchgear.

## Arrangement, connection

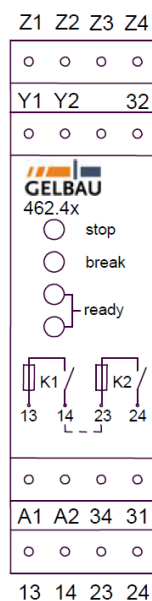

## Wiring diagram

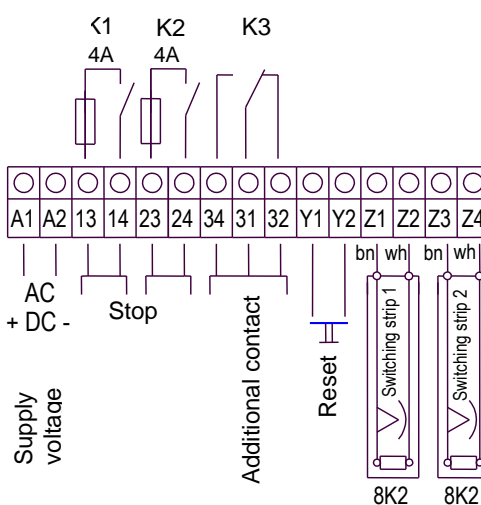

Bridge across Y1, Y2 = automatic reset

## Function

The Contact-Duo switching strips connected to Z1, Z2 and Z3, Z4 are monitored with a quiescent current. To start the device, the reset contact Y1, Y2 must be actuated momentarily. If properly wired, safety contacts 13, 14 and 23, 24 are closed and the two green LEDs (*ready*) are illuminated in the operating state "Ready".

When one of the two Contact-Duo switching strips is actuated (compressed), the two safety relays K1 and K2 drop out and safety contacts 13, 14 and 23, 24 are opened. The red LED lights up (*stop*).

If the quiescent current between Z1 and Z2 or Z3 and Z4 is interrupted, the red LED (*stop*) lights up and, upon actuation of the reset, the yellow LED (*break*) also lights up. Safety contacts 13, 14 and 23, 24 are opened. The additional changeover contact 31, 32, 34 switches on simultaneously with STOP contact 13, 14.

An automatic reset can be configured by bridging the terminals Y1, Y2 together.

**Note:** The additional changeover contact 31, 32, 34 serves only as an auxiliary contact and may not be used in the safety circuit.

## Function table (status display)

Status of switching strip	Red LED	Yellow LED	Green LED (2x)	Output 13, 14 / 23, 24
Properly connected; non-actuated status			illuminated	closed
Strip 1 or 2 actuated (compressed)	illuminated			open
Switching strip 1 or 2 interrupted	illuminated	illuminated *1		open

\*1 = only with reset actuated or automatic reset

### Installation, commissioning

1. Designed for electrical cabinet installation, the housing snaps into a 35 mm top hat rail (TS 35) in accordance with DIN 50022. If control panel installation is desired, a 26-mm-wide top hat segment with two mounting holes for screwed fasteners is available.
2. The Gelbau Contact-Duo switching strips with terminating resistor are connected to terminals Z1, Z2 and Z3, Z4. Note that the brown conductor of the connection cable must be connected to Z1 (Z3) and the white (blue) conductor of the connection cable must be connected to Z2 (Z4).  
If only Switching Strip 1 is connected (Z1, Z2), the second input (Z3, Z4) must be terminated with an 8.2 k $\Omega$  resistor.
3. The load applied to safety relay output 13, 14 / 23, 24 may not exceed 4 A, because a 4 A slow-blow pre-fuse is installed.  
For changeover contact 31, 32, 34 the specified switching capacities must be observed (see "Technical data").
4. The supply voltage is connected to A1 and A2. The (+) pole must be attached to A1.

**The device may be installed and commissioned only by specialists with the relevant qualifications.**

### Troubleshooting and corrective measures

1. no LEDs light up  
Is the supply voltage correct?
2. the red and yellow LEDs are continuously illuminated upon reset contact or automatic reset  
Is the switching strip connected correctly? Is there an interruption/break in the supply line? (Test: temporarily connect an 8.2 k $\Omega$  resistor across Z1, Z2 and Z3, Z4. If device is then OK  $\Rightarrow$  interruption/break.)
3. the red LED is continuously illuminated  
Disconnect switching strip and check with ohmmeter (value must be about 8.2 k $\Omega$ ); possible short circuit in the supply line?
4. the two channels display a different status  
 $\Rightarrow$  Send device back for inspection.

# Original operation manual – Safety relay 462.4x

## Technical specifications

### Housing:

Material: Polyamide PA 6.6  
Protection class: **IP20**  
Dimensions: 22.5 x 100 x 110 mm (W x H x D)  
Snap system for 35-mm TS mounting rail according to DIN EN 50022  
Weight: 175 - 250g

### AC connection voltages:

Model: **462.40:**  
Nominal operating voltage: 230 V/AC -15% +10%  
Nominal frequency: 50 Hz 40 - 60 Hz

Model: **462.41:**  
Nominal operating voltage: 115 V/AC -15% +10%  
Nominal frequency: 50 Hz 40 - 60 Hz

Model: **462.44:**  
Nominal operating voltage: 24 V/AC -15% +10%  
Nominal frequency: 50 Hz 40 - 60 Hz

**Power consumption:** max. 3VA  
**Power supply galvanically isolated acc. to VDE 0551**

### DC connection voltages:

Model **462.46:**  
Nominal operating voltage: 24 V/DC -15% +10%  
Permissible residual ripple: max. 10%  
**Power consumption:** max. 3W

Model **452.48:**  
Nominal operating voltage: 10-36 V/DC  
**Power consumption:** max. 2.1 W  
**Power supply galvanically isolated (DC/DC converter)**

### AC / DC connection voltages:

Model **462.42:**  
Nominal operating voltage: 24-230 V/AC -30% +10%  
24-110 V/DC -30% +10%  
**Power consumption:** max. 4W / 6VA  
**Power supply galvanically isolated acc. to VDE 0551**

### DC connection voltages:

Model **462.46U:** (device without galvanic isolation!)  
Nominal operating voltage: 24 V/DC -15% +10%  
Permissible residual ripple: max. 10%  
**Power consumption:** max. 3W

**Warning! Connection voltage must be galvanically isolated (transformer) according to VDE 0551 ("Un-grounded mains!").**

Technical details subject to change

### Switching strip input (Z1, Z2 and Z3, Z4):

Terminal voltage upon interruption: 8 VDC  
Terminal voltage upon actuation: < 4 VDC  
Terminal voltage in non-actuated state: approx. 5 VDC  
Sensor quiescent current: approx. 0.6 mA  
Switch point upon actuation: < 5.5 k $\Omega$   
Switch point upon interruption: > 11.5 k $\Omega$   
Switching strip termination: 8.2 k $\Omega$  resistor

### Safety relay terminals 13, 14 and 23, 24:

Type of contact 2 relays with 1 NOC each  
-force guided-  
available separately  
Loading capacity max. 4 A  
(internal slow-blow 4 A fuses)

**Drop out time:** Delay between actuation of switching strip and relay signal output: **max. 15 ms**

### Relay contact data (13, 14 and 23, 24):

**Nominal operating current**  
NOC 2A DC13 24V  
NOC 3A AC15 250V

### Relay contact data (31, 32, 34):

**Nominal operating current**  
NCC 1.25A DC13 24V  
NOC 1.25A DC13 24V  
NCC 2A AC15 250V  
NOC 2A AC15 250V

Contact service life, mech.: 3 x 10<sup>7</sup> switch cycles

Contact service life, electr.: 2 x 10<sup>5</sup> switch cycles at max. power

**Rated insulation voltage:** 250 V

**Rated impulse voltage resistance:** 4 kV

**Contamination degree:** 2

**Conditional short-circuit current:** 100 A

**Permissible temperature range:** -20° to + 55° C

**Acoustic noise:** < 35 dB (A)

**Category:** 3

**Standards:**  
Electrical safety: EN60947-5-1:2004+A1:2009

Accepted according to: EN ISO 13849-1:2008/AC:2009  
**Performance Level:** PL: e

Accepted according to: EN 62061:2005+A1:2013  
**Safety Integrity Level:** SIL: 3

**EC Conformity Declaration**  
according to 2006/42/EC, Annex II, no. 1 A



Manufacturer: Gelbau GmbH & Co. KG  
Grandkaule 8 – 10  
53859 Niederkassel, Germany

Ms. Yvonne Riem is duly authorised to compile the technical documentation. Ms. Yvonne Riem  
Gelbau GmbH & Co. KG  
Grandkaule 8 – 10  
53859 Niederkassel

We hereby declare that the type of the following safety relays:

**462.4x**

serial numbers: 0011 bis 9999....

meets the requirements of Performance Level “e” / Category 3 according to EN ISO 13849-1: 2008 and Safety Integrity Level (SIL) 3 according to EN 62061: 2005 and conforms to all applicable provisions of the **EC Machine Directive 2006/42/EC**.

The type of the safety relays is also in conformance with all applicable provisions of the following EC directives: **EMC Directive 2014/30/EU**

Notified body:  
TÜV NORD CERT GmbH  
ID number: 0044  
Langemarckstr. 20  
45141 Essen, Germany

EC type examination certificate no.: 44 205 14059902

The following harmonised standards were applied:

<b>EN ISO 13849-1:2008/ AC:2009</b>	Safety of machinery - Safety-related components of control systems, requirements relative to Performance Level
<b>EN 62061:2005 +A1:2013</b>	Functional safety of safety-related electrically / electronically / programmable requirements relative to SIL
<b>EN ISO 13856-2:2013</b>	“Pressure-sensitive protective devices” in sub-areas, relative to the output switching system
<b>EN 60947-5-1:2004 +A1 :2009</b>	Low-voltage switching devices – part 5-1: Electrical safety
<b>EN61000-3-2:4/2006 +A1:7/2009+A2:7/2009</b>	Electromagnetic Compatibility (EMC)
<b>EN 61000-3-3:9/2008</b>	Electromagnetic Compatibility (EMC)
<b>EN 61000-6-2:2005</b>	Electromagnetic Compatibility (EMC) Part 6-2: Generic standards – Immunity for industrial environments
<b>EN 61000-6-3:1/2007</b>	Electromagnetic Compatibility (EMC) Part 6-2: Generic standards – Emission standard for residential, commercial and light industrial environments

**Notes:**

The user may opt to interconnect switching strip profiles/evaluation unit combinations by means of a Pepperl & Fuchs model Z965/071859 Zener barrier.

Niederkassel, 14.07.2016

Jürgen Menz  
General Manager