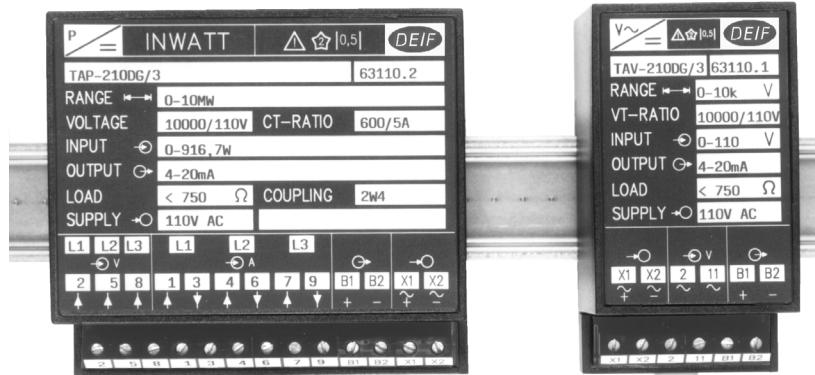


Transducers for AC measurement



Types TAP, TAQ, TMF, TAA, TAV, TAC

4921220002E



- **Measurement of:**
watt, var, frequency, phase angle, voltage, current
- **Accuracy class 0.5**
- **For mounting on DIN rail**
- **Compact design**
- **Aux. voltage: 57.7...440V AC or 24...220V DC**
- **According to IEC 688**



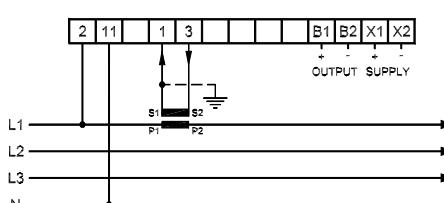
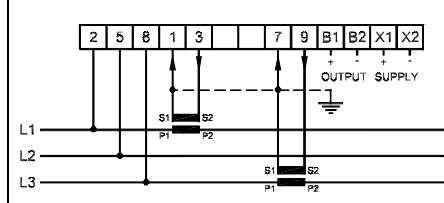
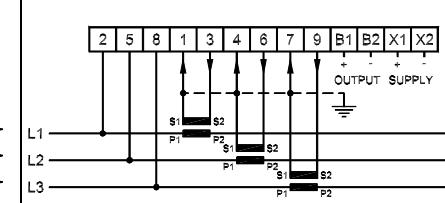


Watt

Transducer type	TAP-210DG/3. 1W		TAP-210DG/3, 1W3		
Type	Single phase network		3-Phase 3 wire network Balanced load		
Connection diagrams for DEIF transducers for DIN rail mounting Numbering of terminals according to DIN 43807					
Measuring principle	Time-Division-Multiplication (TDM) RMS measurement				
Measuring voltage (U_{nom})	57.7..440V AC ±20% (0..120% U_{nom} with separate U_{aux}). (≤ 0.5VA per phase)				
Measuring current (I_{nom})	0.5..10A AC. Measuring range: 0..120% I_{nom} (≤ 0.3VA per phase)				
Measuring range	0.. P_{nom} / - P_{nom} ..0..+ P_{nom}				
Measuring frequency	45..65Hz (300..500Hz)				
Overloads	Voltages	1.2 x U_{nom} , cont. / 2 x U_{nom} for 10 s			
Overloads	Currents	2 x I_{nom} , cont. / 10 x I_{nom} for 10 s (max. 75A) / 40 x I_{nom} for 1 sec (max. 300A)			
Output (0..100%)	0..1mA, 0..5mA, 0..10mA, 0..20mA, 0..1V, 0..10V				
Output (20..100%)	0.2..1mA, 1..5mA, 2..10mA, 4..20mA, 0.2..1V, 2..10V				
Output (-100%..0..+100%)	-1..0..+1mA, -5..0..+5mA, -10..0..+10mA, -20..0..+20mA, -1..0..+1V, -10..0..+10V				
Output loads	Current Output: max. 15V, voltage Output: max. 20mA				
Accuracy	Class 0.5 (-10..15..30..55°C) according to IEC 688				
Response time/ripple	<150 ms / 1% _{pp} according to IEC 688				
$\Delta U_{\text{out}} / \Delta U_{\text{aux}} / \Delta f_{\text{aux}} / \Delta R_{\text{load}}$	Max. 0.1% / Δ10% U_{aux} / 0.1%/45..65Hz / 0.1% / ΔR_{load} -max.				
Temperature coefficient	Typically 0.15% per 10°C. Max. 0.2% per 10°C				
Ambient temperature	-10..+55°C (nominal). -25..+70°C (operating). -40..+70°C (storage)				
Auxiliary supply (U_{aux}) (45..65Hz)	57.7 - 63.5 - 100 - 110 - 120 - 127 - 220 - 230 - 240 - 380 - 415 - 440V AC ±20% (3.5VA)				
Test voltage	2000V - 50Hz - 1 min.				
EMC	According to EN 50081-1/2, EN 50082-1/2, SS4361503 (PL4), IEC 255-4 (class 3). CE marked				
Climate	Class HSE, according to DIN 40040				
Protection	Case: IP52. Terminals: IP20. According to IEC 529 and EN 60529				
Terminals	Screw Terminals. Multi-stranded: 2.5 mm ² / single-stranded: 4.0 mm ²				
Case type	See rear page	1	1		

Order specifications

Type	TAP-210DG/3 INWATT	TAP-210DG/3 INWATT
Connection (See drawing)	1W	1W3
Measuring range	x	x
Current transformer ($I_{\text{pri}} : I_{\text{sec}}$)	x	x
Measuring voltage (U_{nom})	x	x
Voltage transformer ($U_{\text{pri}} : U_{\text{sec}}$)	x	x
Auxiliary voltage (U_{aux})	x	x
Output signal	x	x

TAP-210DG/3, 1W4	TAP-210DG/3, 2W	TAP-210DG/3, 2W4
3-Phase 4-wire network Balanced load	3-Phase 3 wire network Unbalanced load	3-Phase 4-wire network Unbalanced load
		

24 - 48 - 110 - 220V DC -25/+30% ($\leq 2.5\text{W}$)

for residential, commercial and light industry plus industrial environment

1	1	1
---	---	---

TAP-210DG/3 INWATT	TAP-210DG/3 INWATT	TAP-210DG/3 INWATT
1W4	2W	2W4
x	x	x
x	x	x
x	x	x
x	x	x
x	x	x
x	x	x

See rear page for calculation of measuring range for watt/var transducers



Var

Transducer type			
Type	TAQ-210DG/3, 1VAR3	TAQ-210DG/3, 1VAR4	
Measuring	3-Phase 3-wire network Balanced load	3-Phase 4-wire network Balanced load	
Connection diagrams for DEIF transducers for DIN rail mounting			
Numbering of terminals according to DIN 43807			
Measuring principle	Time-Division-Multiplication (TDM) RMS measurement		
Measuring voltage (U_{nom})	57.7..440V AC ±20% (0..120% U_{nom} with separate U_{aux}), (≤ 0.5VA per phase)		
Measuring current (I_{nom})	0.5..10A AC. Measuring range: 0..120% I_{nom} (≤ 0.3VA per phase)		
Measuring range	0.. Q_{nom} / - Q_{nom} ..+ Q_{nom}		
Measuring frequency	45..65Hz (300..500Hz)		
Overloads Voltages	1.2 x U_{nom} , cont. / 2 x U_{nom} for 10 s		
Overloads Currents	2 x I_{nom} , cont. / 10 x I_{nom} for 10 s (max. 75A) / 40 x I_{nom} for 1 sec (max. 300A)		
Output (0..100%)	0..1mA, 0..5mA, 0..10mA, 0..20mA, 0..1V, 0..10V		
Output (20..100%)	0.2..1mA, 1..5mA, 2..10mA, 4..20mA, 0.2..1V, 2..10V		
Output (-100%..0..+100%)	-1..0..+1mA, -5..0..+5mA, -10..0..+10mA, -20..0..+20mA, -1..0..+1V, -10..0..+10V		
Output loads	Current Output: max. 15V, voltage Output: max. 20mA		
Accuracy	Class 0.5 (-10..15..30..55°C) according to IEC 688		
Response time/ripple	<150 ms / 1% _{pp} according to IEC 688		
$\Delta U_{\text{out}} / \Delta U_{\text{aux}} / \Delta f_{\text{aux}} / \Delta R_{\text{load}}$	Max. 0.1% / Δ10% U_{aux} / 0.1%/45..65Hz / 0.1% / ΔR _{load} -max.		
Temperature coefficient	Typically 0.15% per 10°C. Max. 0.2% per 10°C		
Ambient temperature	-10..+55°C (nominal), -25..+70°C (operating), -40..+70°C (storage)		
Auxiliary supply (U_{aux}) (45..65Hz)	57.7 - 63.5 - 100 - 110 - 120 - 127 - 220 - 230 - 240 - 380 - 415 - 440V AC ±20% (≤3.5VA)		
Test voltage	2000V - 50Hz - 1 min.		
EMC	According to EN 50081-1/2, EN 50082-1/2, SS4361503 (PL4), IEC 255-4 (class 3). CE marked		
Climate	Class HSE, according to DIN 40040		
Protection	Case: IP52. Terminals: IP20. According to IEC 529 and EN 60529		
Terminals	Screw Terminals. Multi-stranded: 2.5 mm ² / single-stranded: 4.0 mm ²		
Case type	See rear page	1	1

Order specifications

Type	TAQ-210DG/3 INWATT	TAQ-210DG/3 INWATT
Connection (See drawing)	1VAR3	1VAR4
Measuring range	x	x
Current transformer ($I_{\text{pri}} : I_{\text{sec}}$)	x	x
Measuring voltage (U_{nom})	x	x
Voltage transformer ($U_{\text{pri}} : U_{\text{sec}}$)	x	x
Auxiliary voltage (U_{aux})	x	x
Output signal	x	x



Frequency

TAQ-210DG/3, 2VAR	TAQ-210DG/3, 2VAR4	TMF-210DG/2
3-Phase 3-wire network Unbalanced load	3-Phase 4-wire network Unbalanced load	Mains frequency

Crystal controlled one-shot	
57.7..440V AC ±20% ($\leq 0.5\text{VA}$)	
$f_{\text{nom}} \pm 3\text{Hz}, \pm 5\text{Hz}, \pm 10\text{Hz}$	
f_{nom} 50Hz, 55Hz, 60Hz	

	Class 0.2 of f_{max}
	350 ms / 0.5% _{pp}

Typ. 0.05% per 10°C, max. 0.1% per 10°C	
24 - 48 - 110 - 220V DC -25/+30% ($\leq 2.5\text{W}$)	($\leq 2\text{VA}/2\text{W}$)
for residential, commercial and light industry plus industrial environment	

1	1	1

TAQ-210DG/3 INWATT	TAQ-210G/3 INWATT	TMF-210DG/2
2VAR	2VAR4	
x	x	x
x	x	
x	x	x
x	x	x
x	x	x

See rear page for calculation of measuring range for watt/var transducers








Phase angle

Transducer type			
Type	TAA-210DG/2, WC1	TAA-210DG/2, WC3	
Measuring	3-Phase network 4-wire	3-Phase network 3- or 4-wire	
Connection diagrams for DEIF transducers for DIN rail mounting			
Numbering of terminals according to DIN 43807			
Measuring principle	Zero crossing detection. NOTE: Output proportional to phase angle (ϕ)		
Measuring voltage (U_{nom})	57.7..440V AC ±20% ($\leq 0.5\text{VA}$)		
Measuring current (I_{nom})	-/1A - /5A. Measuring range: 20..120% I_{nom} (class 0.5) 5..20% (class 1) ($\leq 0.3\text{VA}$)		
Measuring range	0.5 cap...1..0.5 ind. / 0.7 cap...1..0.3 ind. / 0..1 cap. / 0..1 ind.		
Measuring frequency	45..65Hz (300..500Hz)		
Overloads	Voltages	1.2 x U_{nom} , cont. / 2 x U_{nom} for 10 s	
Overloads	Currents	2 x I_{nom} , cont. / 10 x I_{nom} for 10 s (max. 75A) / 40 x I_{nom} for 1 sec (max. 300A)	
Output (0..100%)	0..1mA, 0..5mA, 0..10mA, 0..20mA, 0..1V, 0..10V		
Output (20..100%)	0.2..1mA, 1..5mA, 2..10mA, 4..20mA, 0.2..1V, 2..10V. With separate aux. voltage		
Output (-100%..0..+100%)	-1..0..+1mA, -5..0..+5mA, -10..0..+10mA, -20..0..+20mA, -1..0..+1V, -10..0..+10V		
Output loads	Current Output: max. 15V, voltage Output: max. 20mA		
Accuracy	Class 0.5 (-10..15..30..55°C) according to IEC 688		
Response time/ripple	<300 ms / 1% _{pp} according to IEC 688		
$\Delta U_{out} / \Delta U_{aux} / \Delta f_{aux} / \Delta R_{load}$	Max. 0.1% / $\Delta 10\% U_{aux}$ / 0.1% / 45..65Hz / 0.1% / ΔR_{load} -max.		
Temperature coefficient	Typically 0.15% per 10°C. Max. 0.2% per 10°C		
Ambient temperature	-10..+55°C (nominal), -25..+70°C (operating), -40..+70°C (storage)		
Auxiliary supply (U_{aux}) (45..65Hz)	57.7 - 63.5 - 100 - 110 - 120 - 127 - 220 - 230 - 240 - 380 - 415 - 440V AC ±20% ($\leq 2\text{VA}$)		
Test voltage	2000V - 50Hz - 1 min.		
EMC	According to EN 50081-1/2, EN 50082-1/2, SS4361503 (PL4), IEC 255-4 (class 3). CE marked		
Climate	Class HSE, according to DIN 40040		
Protection	Case: IP52. Terminals: IP20. According to IEC 529 and EN 60529		
Terminals	Screw Terminals. Multi-stranded: 2.5 mm ² / single-stranded: 4.0 mm ²		
Case type	See rear page	1	1

Order specifications

Type	TAA-210DG/2	
Connection (See drawing)	WC1	WC3
Measuring range	x	x
Current transformer (I_{pri} : I_{sec})	x	x
Measuring Voltage (U_{nom})	x	x
Voltage transformer (U_{pri} : U_{sec})	x	x
Auxiliary voltage (U_{aux})	x	x
Output signal	x	x

 Voltage		 Current		
TAV-210DG/3	TAV-220DG/3	TAC-210DG/3	TAC-220DG/3	TAC-230DG/2
AC voltage With aux. supply		AC current With aux. supply		No aux. supply 2-wire transducer
				
Average measurement				
57.7..440V AC (0.5VA)	57.7..440V AC (4.5VA)	—	—	—
—	—	0.5..10A ($\leq 0.3\text{VA}$)	—	-/1A & -/5A ($\leq 2\text{VA}$)
80..120%/ $0..120\%$ U_{nom}	0...30..120% U_{nom}	0..100% I_{nom}	0..100% I_{nom} (standard) or 0..120% I_{nom}	—
—	—	As TAA-210DG	1.5 $\times I_{\text{nom}}$ cont./10 $\times I_{\text{nom}}$ - 5 s/40 $\times I_{\text{nom}}$ - 1sec	—
—	0..25..100%	As TAA-210DG	0..5mA/10mA/20mA	—
—	—	As TAA-210DG	—	4..20mA
—	—	—	Max. 15V	$U_{\text{supply}} - 10\text{V}$
<500 ms / 1% _{RMS}	<200 ms / 1% _{RMS}	—	<300 ms / 1% _{pp} - IEC 688	—
—	—	—	$\leq 1\% \Delta \text{out} / \Delta R_{\text{load-max.}}$	As TAA-210DG
24-48-110-220VDC -25/+30% ($\leq 2\text{W}$)	To terminals 2 - 11	As TAA-210DG	NONE	$U_{\text{supply}} = 12..30\text{V DC}$
for residential, commercial and light industry plus industrial environment				
2	2	2	2	2

TAV-210DG/3	TAV-220DG/3	TAC-210DG/3	TAC-220DG/3	TAC-230DG/2
x	x	x	x	x
		x	x	x
x	x			
x		x		
x	x	x	x	

Calculation of measuring range for watt/var transducers

U = Nominal mains voltage. 3-phase network: Between 2 phases (e.g. 3 x 10kV).
 Single phase network: Between phase and neutral.

I = Primary rated current (rated value, e.g. 500/1).

	Lowest measuring range	Highest measuring range
3-Phase network	$0.5 \times \sqrt{3} \times U \times I$	$2 \times \sqrt{3} \times U \times I$
Single phase network	$0.5 \times U \times I$	$2 \times U \times I$

Standard measuring ranges: 1 - 1.2 - 1.5 - 2 - 2.5 - 3 - 4 - 5 - 6 - 7.5 - 8 and multiples of 10 and 100 thereof.

Example

3-phase network, balanced load:	3 x 10kV	
Voltage transformer:	10k/100	
Current transformer:	500/1A	
Lowest Measuring range:	$W = 0.5 \times \sqrt{3} \times 10.000 \times 500 = 4.3\text{MW}$	Nearest higher standard range: 5.0MW
Highest Measuring range:	$W = 2 \times \sqrt{3} \times 10.000 \times 500 = 17.3\text{MW}$	Nearest lower standard range: 15.0MW
Possible ranges:	5 - 6 - 7.5 - 8 - 10 - 12 - 15MW. Could be chosen according to calculated current consumption, power factor and a suitable deflection or output.	

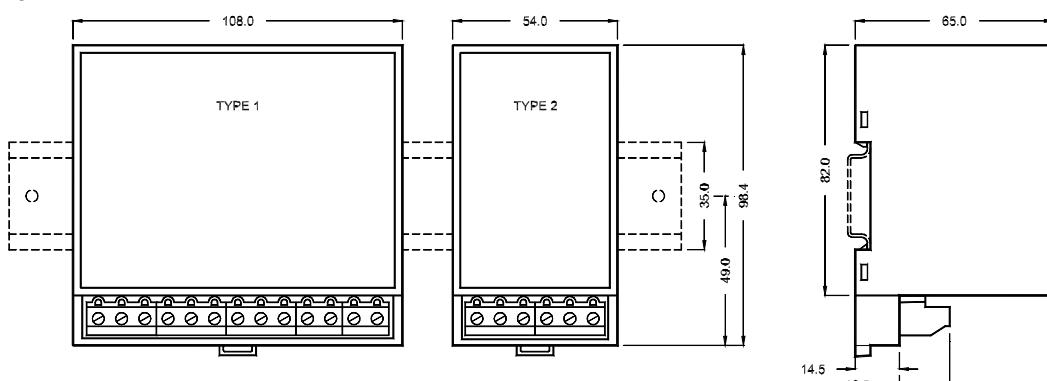
Note: The Measuring range of a VAR transducer should be $\geq 50\%$ of the selected measuring range of the corresponding WATT transducer, e.g. WATT transducer: -12...0...12MW, VAR transducer: -6...0...6Mvar or higher.

Order specifications for above example

Type	TAP-210DG/3
Connection (See drawing)	1W3
Measuring range	-15.0..+15MW
Current transformer ($I_{pri} : I_{sec}$)	500/1A
Measuring Voltage (U_{nom})	3 x 10kV
Voltage transformer ($U_{pri} : U_{sec}$)	10k/100
Auxiliary voltage (U_{aux})	220V AC
Output signal	-10..0..+10V

Dimensional details

All dimensions in mm



Weight: max. 0.5 kg

max. 0.35 kg

Transducers for DIN rail mounting

Recommended distance between mounted transducers: 30 mm

Due to our continuous development we reserve the right to supply equipment which may vary from the described.